

157-187 hp
4.4 liter


1204J-E44TTA

EU Stage V, U.S. EPA & CARB Tier 4 Final

Industrial
Agricultural
Mobile, Stationary or Portable


Specifications

Type	Diesel 4 Stroke
Configuration	4 In-line
Air Handling	Series Turbocharged Aftercooled
Bore X Stroke	105 mm X 127 mm
Displacement	4.4 L
Compression Ratio	16.5:1
Valves Per Cylinder	4
Rotation	Anti-Clockwise, viewed on Flywheel
Fuel System	Electronic High Pressure Common Rail
Aftertreatment System	DOC, DPF, SCR, SCR Auxiliaries

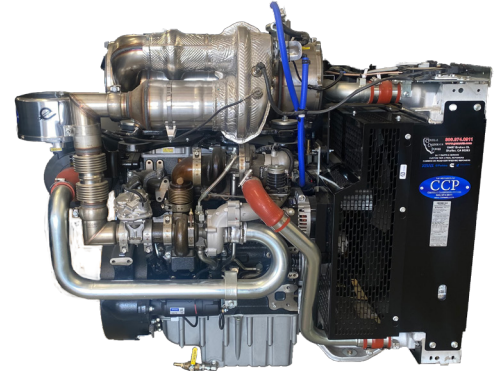

Engine Configuration Options

Emissions Configuration	Tier 4 Final / Stage 5
Flywheel Housing	SAE3 as Standard
Flywheel	SAE3 as Standard
Air Compressor	Yes
Voltage	12 V or 24 V
Alternator	12 V or 24 V
Starter	12 V or 24 V

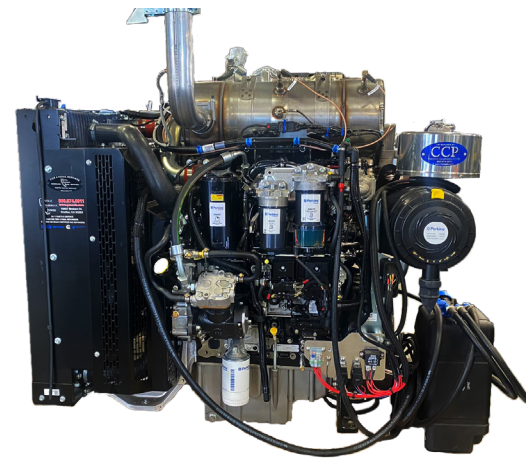

Dimensions

Base Engine L X W X H	26.8 in. X 24 in. X 17.8 in.
Weight (Dry)	1,559 lbs.



Powering Businesses

Since 1982





**157-187 hp
4.4 liter**

1204J-E44TTA

EU Stage V, U.S. EPA & CARB Tier 4 Final

**Industrial
Agricultural
Mobile, Stationary or Portable**

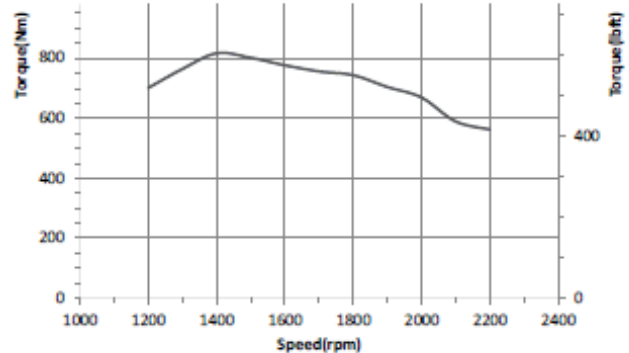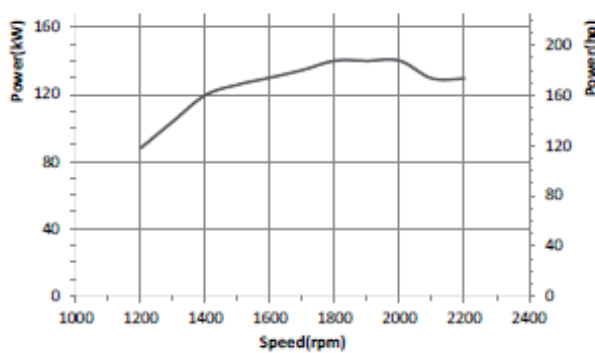

Engine Ratings					
Speed RPM	Power hp	Speed RPM	Torque NM	Torque lb./ft.	Rating Type
2200	157	1400	710	523	C
2200	173	1400	750	553	C
2200	187	1400	815	601	C



Powering Businesses

Since 1982

