

143-218 hp
5 liter

D5 TAD570-572VE

EU Stage V, U.S. EPA & CARB Tier 4 Final

Industrial
Agricultural
Mobile, Stationary or Portable

Specifications

Type	Diesel 4 Stroke
Configuration	4-Inline
Air Handling	Turbo
Bore X Stroke	110 mm X 135 mm
Displacement	5.13 L
Compression Ratio	17.5:1
Valves Per Cylinder	4
Rotation	Right Hand
Fuel System	Common Rail
Aftertreatment System	SCR & Cooled EGR Only

Engine Configuration Options

Emissions Configuration	Tier 4 Final
Flywheel Housing	SAE 2
Flywheel	SAE 2
Air Compressor	Option Available
Voltage	24 V
Alternator	110/130 Amp
Starter	5 kW 24 V

Dimensions

Base Engine L X W X H	37 in. X 34 in. X 39 in.
Weight (Dry)	1,933 lbs.



Powering Businesses

Since 1982




**V O L V O
P E N T A**

143-218 hp
5 liter

D5 TAD570-572VE

EU Stage V, U.S. EPA & CARB Tier 4 Final

Industrial
Agricultural
Mobile, Stationary or Portable

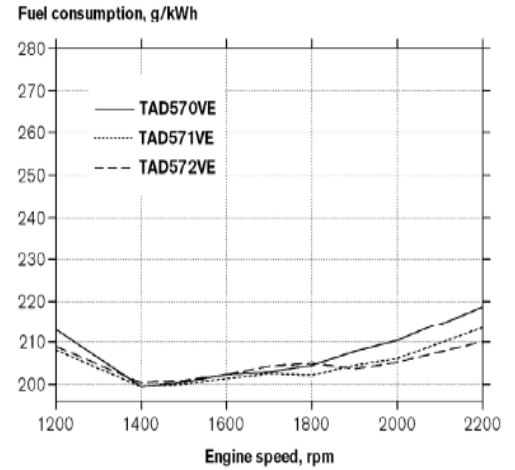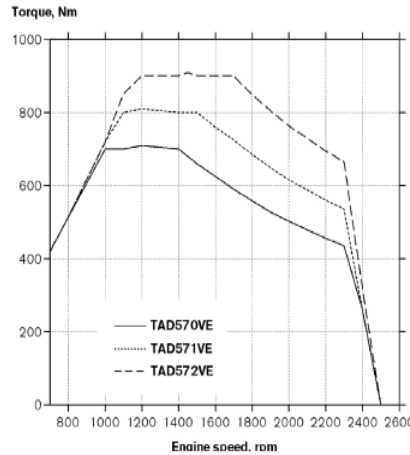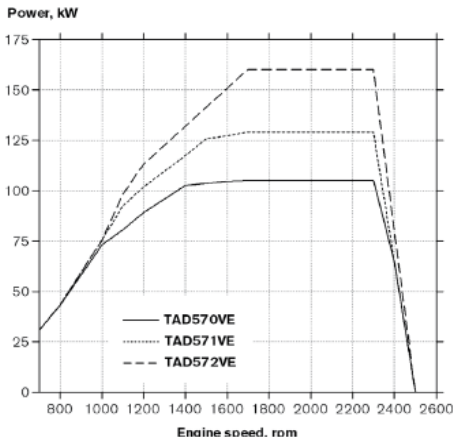

Engine	kW	hp	rpm	ft./lb
TAD570VE	105	143	2300	523
TAD571VE	129	175	2300	597
TAD572VE	160	218	2300	671



Powering Businesses

Since 1982

**V O L V O
P E N T A**

www.gensets.com | 661-589-2870 | 19487 Broken Ct. Shafter, CA