

320-388 hp
11 liter

D11 TAD1170-1172VE

EU Stage V, U.S. EPA & CARB Tier 4 Final

Industrial
Agricultural
Mobile, Stationary or Portable

Specifications

Type	Diesel 4 Stroke
Configuration	6 In-Line
Air Handling	Turbo
Bore X Stroke	123 mm X 152 mm
Displacement	10.74 L
Compression Ratio	17:1
Valves Per Cylinder	4
Rotation	Right Hand
Fuel System	Electronic High Pressure Unit Injector
Aftertreatment System	SCR and EGR Only

Engine Configuration Options

Emissions Configuration	Tier 4 Final
Flywheel Housing	SAE1
Flywheel	SAE1
Air Compressor	Option Available
Voltage	24 V
Alternator	110/130 Amp
Starter	5.5kW 24 V

Dimensions

Base Engine L X W X H	58.6 in. X 35 in. X 53 in.
Weight (Dry)	2,363 lbs.



Powering Businesses

Since 1982




**V O L V O
P E N T A**

**320-388 hp
11 liter**

D11 TAD1170-1172VE

EU Stage V, U.S. EPA & CARB Tier 4 Final

Industrial
Agricultural
Mobile, Stationary or Portable

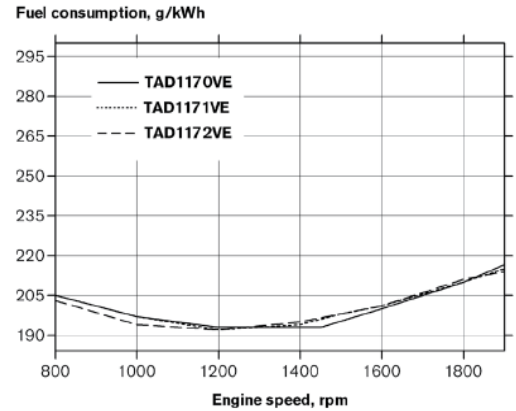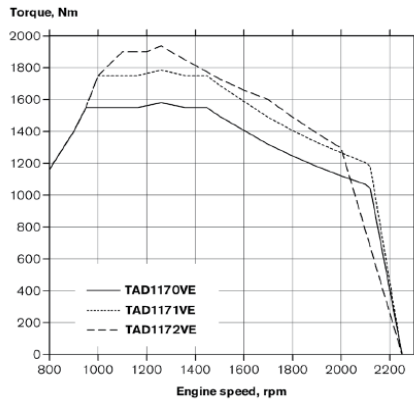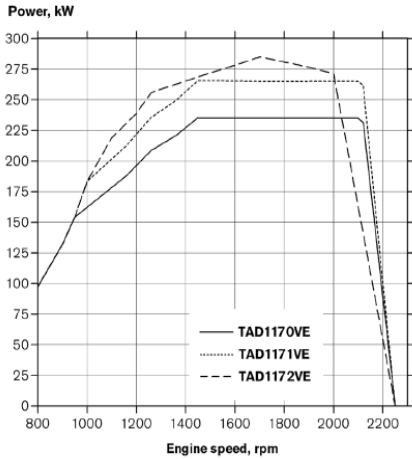

Engine	kW	hp	rpm	ft./lb
TAD1170VE	235	320	2100	1166
TAD1171VE	265	360	2100	1316
TAD1172VE	285	388	1700	1429



Powering Businesses

Since 1982

**V O L V O
P E N T A**