137-147 hp 4.4 liter

1204J-E44TA

EU Stage V, U.S. EPA & CARB Tier 4 Final

Industrial Agricultural Mobile, Stationary or Portable

	Specifications		
Туре	Diesel 4 Stroke		
Configuration	4 In-line		
Air Handling	Turbocharged Aftercooled		
Bore X Stroke	105 mm X 127 mm		
Displacement	4.4 L		
Compression Ratio	16.5:1		
Valves Per Cylidner	4		
Rotation	Anti-Clockwise, viewed on Flywheel		
Fuel System	Electronic High Pressure Common Rail		
Aftertreatment System	DOC, DPF, SCR, SCR Auxilaries		



Engine Configuration Options

26.5 in. X 18.8 in. X 15.3 in.

1,523 lbs.

Emissions Configuration	ion Tier 4 Final / Stage 5		
Flywheel Housing	SAE2 and SAE3 Configurations		
Flywheel	SAE2 and SAE3 Configurations		
Air Compressor	Yes		
Voltage	12 V or 24 V		
Alternator	12 V or 24 V		
Starter	12 V or 24 V		
	Dimensions		





Base Engine L X W X H

Weight (Dry)

Powering Businesses

Since 1982




137-147 hp 4.4 liter

1204J-E44TA

EU Stage V, U.S. EPA & CARB Tier 4 Final

Industrial Agricultural Mobile, Stationary or Portable

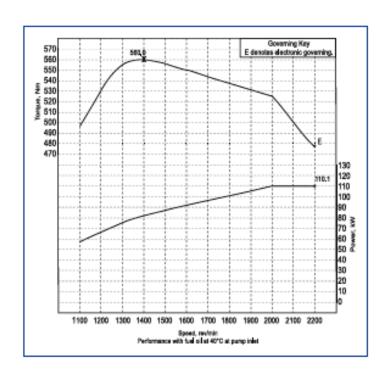

Engine Ratings							
Speed RPM	Power hp	Speed RPM	Torque NM	Torque lb./ft.	Rating Type		
2200	137	1400	560	413	С		
2200	147.6	1400	560	413	С		



Powering Businesses

Since 1982

