

**74 hp
2.2 liter**

404J-E22TA

EU Stage V, U.S. EPA & CARB Tier 4 Final

**Industrial
Agricultural
Mobile, Stationary or Portable**

Specifications



Type	Diesel 4 Stroke
Configuration	4 Vertical In-Line
Air Handling	Turbocharged
Bore X Stroke	84 mm X 100 mm
Displacement	2.2 L
Compression Ratio	18:1
Valves Per Cylinder	4
Rotation	Anti-Clockwise, viewed on Flywheel
Fuel System	Direct Injection
Aftertreatment System	DOC + DPF

Engine Configuration Options

Emissions Configuration	Tier 4 Final / Stage 5
Flywheel Housing	SAE 4
Flywheel	SAE 4
Air Compressor	No
Voltage	12 V
Alternator	12 V ; 85 Amp
Starter	12 V

Dimensions

Base Engine L X W X H	38 in. X 24.5 in. X 38.8 in.
Weight (Dry)	619 lbs.

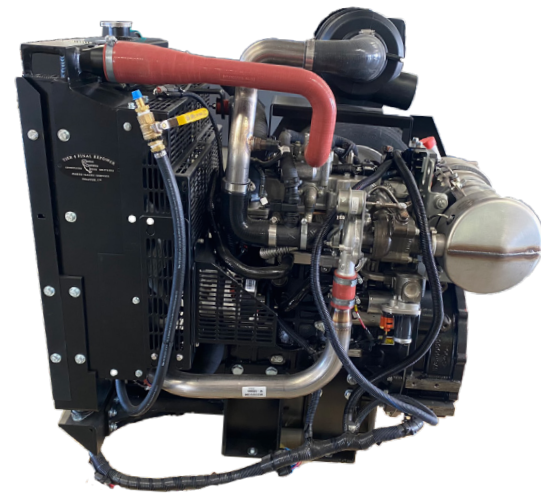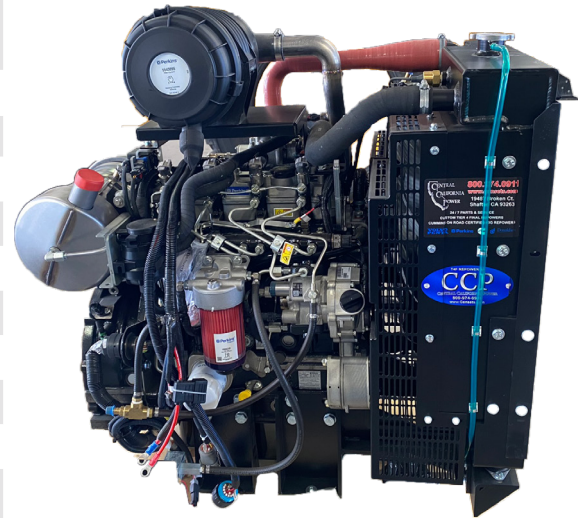

Powering Businesses

Since 1982





**74 hp
2.2 liter**

404J-E22TA

EU Stage V, U.S. EPA & CARB Tier 4 Final

**Industrial
Agricultural
Mobile, Stationary or Portable**

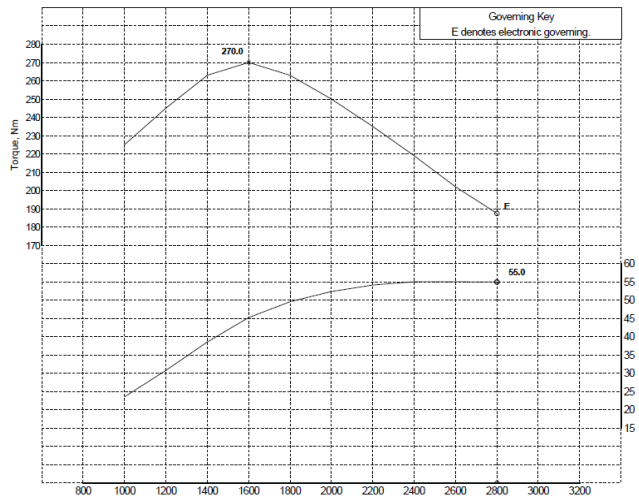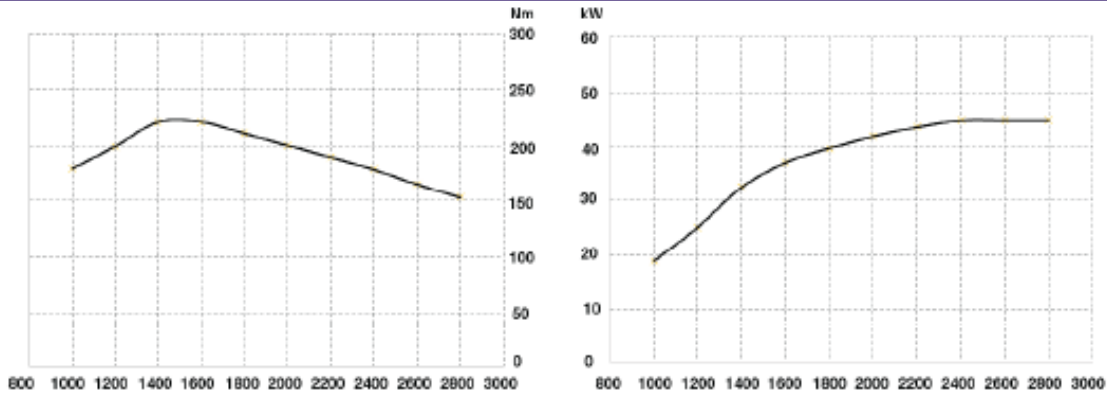

Engine Ratings				
Speed RPM	Power hp	Torque NM	Torque lb./ft.	Rating Type
2800	74	270	199	C



Powering Businesses

Since 1982

